

comsol

Model: DC100CAW
100W 4-Port GaN
PD Desktop Charger



In the Box

- 1 x 100W 4-Port GaN PD Desktop Charger
- 1 x AC Power Cable
- 1 x User Manual

Operating Instructions

- Using the included AC power cable, connect the charger to a wall outlet.
- Connect your Windows laptop, MacBook or Chromebook to either USB-C1 or USB-C2 for up to 100W of power.
- Connect your phone, iPad, tablet or other USB device to either USB-C3 or USB-A for fast-charging support.

Specifications

Dimensions: 90.2mm (W) x 94.5mm (D) x 21.8mm (H)

Weight: 274g

Input: AC 100V-240V~50/60Hz 2.0A Max

USB-C1/USB-C2 Output: 100W Max


5V = 3.00A(15W)		9V = 3.00A(27W)
15V = 3.00A(45W)		20V = 5.00A(100W)

USB-C3 Output: 65W Max

5V = 3.00A(15W)		9V = 3.00A(27W)
15V = 3.00A(45W)		20V = 3.25A(65W)

USB-A Output: 22.5W Max

5V = 3.00A(15W)		9V = 2.00A(18W)
12V = 1.50A(18W)		10V = 2.25A(22.5W)

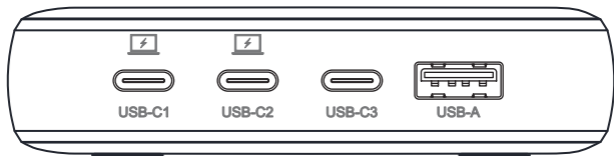

Power Distribution Table

The following table shows how the power is distributed when charging multiple devices at the same time.

	USB Port/s	Total Output	USB C1	USB C2	USB C3	USB A
One	C1 or C2	100W	100W		/	/
	C3	65W	/	/	65W	/
	USB-A	18W	/	/	/	18W
Two	C1+C2 or C3	100W	70W	30W		/
	C2+C3	100W	/	70W	30W	/
	C1 or C2+A	88W	70W		/	18W
	C3+A	24W	/	/	12W	12W
Three	C1+C2+C3	95W	45W	30W	20W	/
	C1+C2+A	93W	45W	30W	/	18W
	C1/C2+C3+A	94W	70W		12W	12W
Four	C1+C2+C3+A	90W	45W	30W	7.5W	7.5W

Important Safety Instructions

- Designed for indoor/home use.
- This product is for use with audio, video and information technology equipment only.
- Disconnect the device when not in use.
- Do not use if damaged or broken.
- Do not use if pins are broken or marked.
- Do not use near water or while device is wet.
- Do not use near open flames or heaters.
- Do not cover or use in confined spaces to avoid overheating.
- Keep out of reach of children.

Support

Please contact Comsol support if you're concerned the product is faulty or damaged. Contact information can be found at: comsol.com.au/tech-support

